


LOC I-OXK 109.9	APP CRS 139°	Rwy Idg 8010 TDZE 459 Apt Elev 459
---------------------------	------------------------	---

ILS or LOC RWY 14R



SCOTT AFB/MIDAMERICA (BLV)

ASR For inop ALS, increase S-ILS 14R Cat E visibility to RVR 4000 and S-LOC 14R Cat E visibility to 1¼ mile. DME from SKE TACAN. **RVR 1800 authorized with use of FD or AP or HUD to DA.

ALSIF-1 

MISSED APPROACH: Climb to 2200 then on TOY VORTAC R-148 to WOMUG INT and hold.

ATIS ★ 128.7 256.7	ST LOUIS APP CON 125.2 281.5	SCOTT TOWER 128.25 253.5	GND CON 119.2 275.8	CLNC DEL 119.875 225.4 263.025
------------------------------	--	------------------------------------	-------------------------------	--

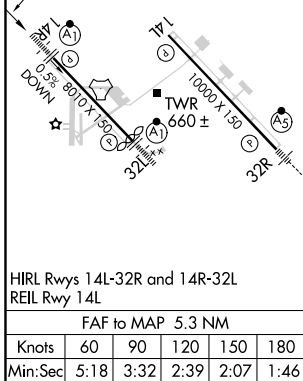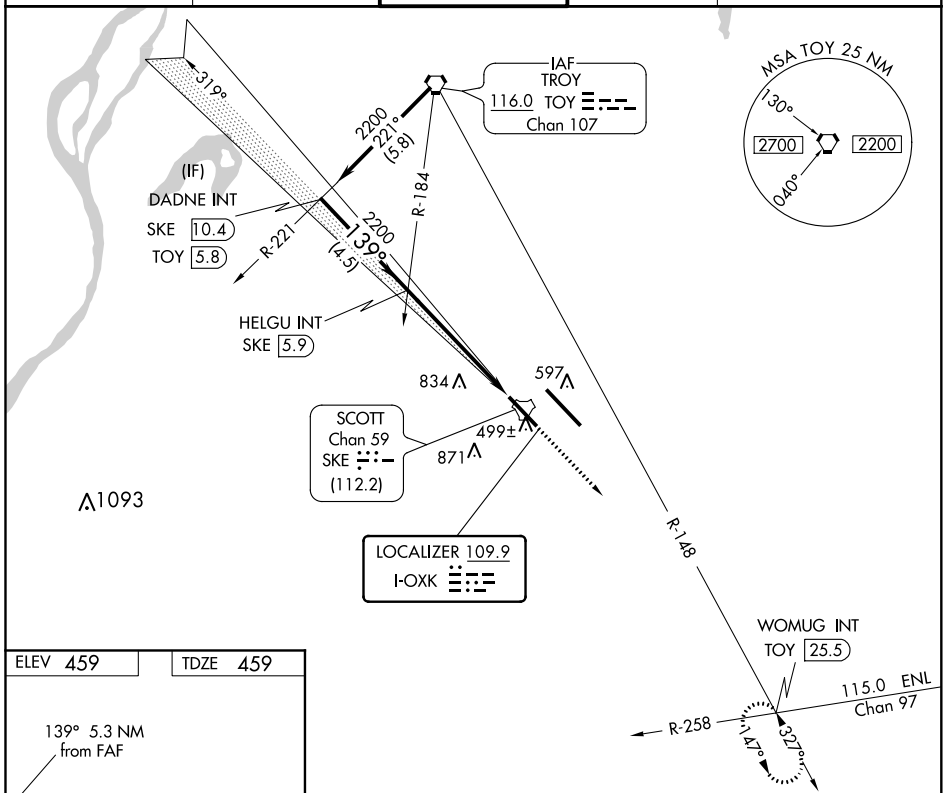

	DADNE INT SKE 10.4	HELGU INT SKE 5.9	2200	TOY R-148	WOMUG INT
	2200	139°	2200	SKE 0.6	
	GS 3.00° TCH 51		4.5 NM	5.3 NM	
CATEGORY	A	B	C	D	E
S-ILS 14R**	659/24 200 (200-½)				
S-LOC 14R	1040/24	581 (600-½)	1040-1¼ 581 (600-1¼)		
CIRCLING	1040-1 581 (600-1)	1080-1 621 (700-1)	1240-2¼ 781 (800-2¼)	1240-2½ 781 (800-2½)	1240-2¾ 781 (800-2¾)

EC-3, 25 FEB 2021 to 25 MAR 2021

EC-3, 25 FEB 2021 to 25 MAR 2021