

WAAS CH 58218 W 14A	APP CRS 139°	Rwy Idg 10000 TDZE 442 Apt Elev 459
---	------------------------	--


RNAV (GPS) RWY 14L

SCOTT AFB/MIDAMERICA (BLV)



⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F).
⚠ DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using St Louis Downtown altimeter setting.
ASR When local altimeter setting not received, use St Louis Downtown altimeter setting; increase LPV DA to 684 feet and LNAV/VNAV DA to 976 feet and all MDA 60 feet; increase LNAV/VNAV all Cats visibility 1/8 mile and increase Circling Cat C/D visibility 1/4 mile.

MISSED APPROACH:
 Climb to 2300 direct JIRUB and on track 103° to DUTMY and hold.

ATIS ★ 128.7 256.7	ST LOUIS APP CON 125.2 281.5	SCOTT TOWER 128.25 253.5	GND CON 119.2 275.8	CLNC DEL 119.875 225.4 263.025
------------------------------	--	------------------------------------	-------------------------------	--

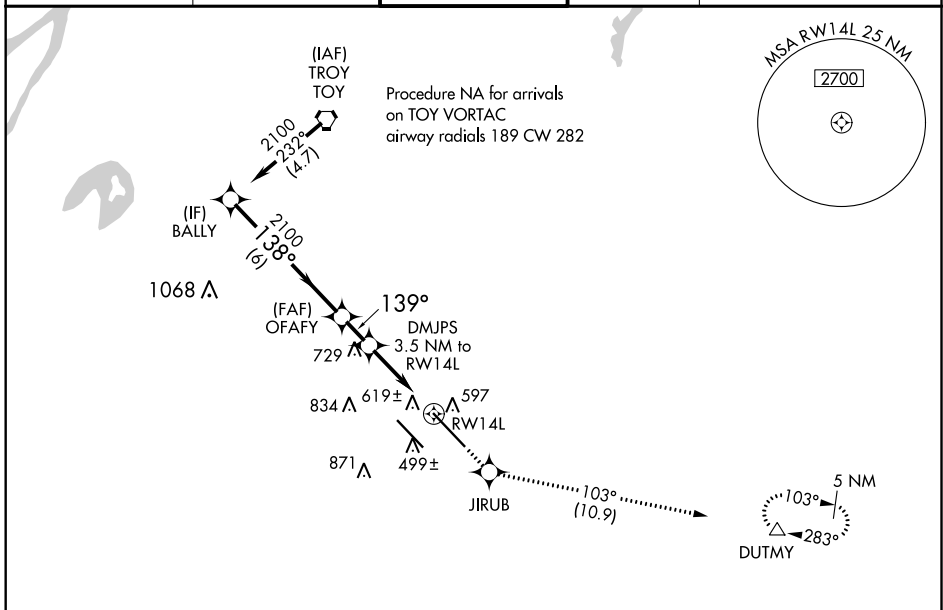

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).	2300	JIRUB	DUTMY
	↑	✦	tr 103°
			△

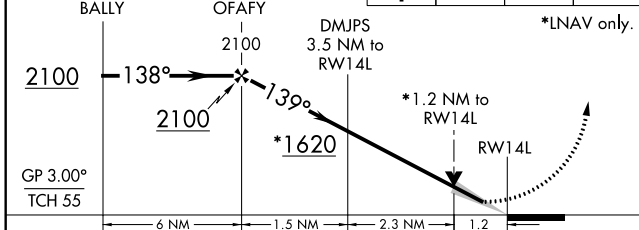

CATEGORY	A	B	C	D
LPV DA	642/40 200 (200-3/4)			
LNAV/VNAV DA	934-1 5/8 492 (500-1 5/8)			
LNAV MDA	900/55	458 (500-1)	900-1 3/8 458 (500-1 5/8)	
C CIRCLING	1000-1 541 (600-1)	1080-1 621 (700-1)	1240-2 1/4 781 (800-2 1/4)	1240-2 1/2 781 (800-2 1/2)

REIL Rwy 14L
 HIRL Rwys 14R-32L and 14L-32R

EC-3, 25 FEB 2021 to 25 MAR 2021

EC-3, 25 FEB 2021 to 25 MAR 2021