

WAAS CH <b>70423</b> <b>W35A</b>	APP CRS <b>352°</b>	Rwy Idg <b>4305</b> TDZE <b>1616</b> Apt Elev <b>1616</b>
--	------------------------	---


# RNAV (GPS) RWY 35

CLINTON RGNL (CLK)

**⚠** DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C (11°F) or above 54°C (130°F). Circling NA to Rwy 13 and 31. When local altimeter setting not received, use Weatherford altimeter setting; Increase DA to 1902 and all visibilities ½ mile; increase all MDA 40 feet and visibility Cat C ¼ mile. Baro-VNAV and VDP NA when using Weatherford altimeter setting.

**MISSED APPROACH:** Climb to 2400 then climbing left turn to 4000 direct OSUCU and hold.

AWOS-3 <b>119.225</b>	FORT WORTH CENTER <b>128.4 269.37</b>	UNICOM <b>122.8 (CTAF) 0</b>
--------------------------	--	---------------------------------

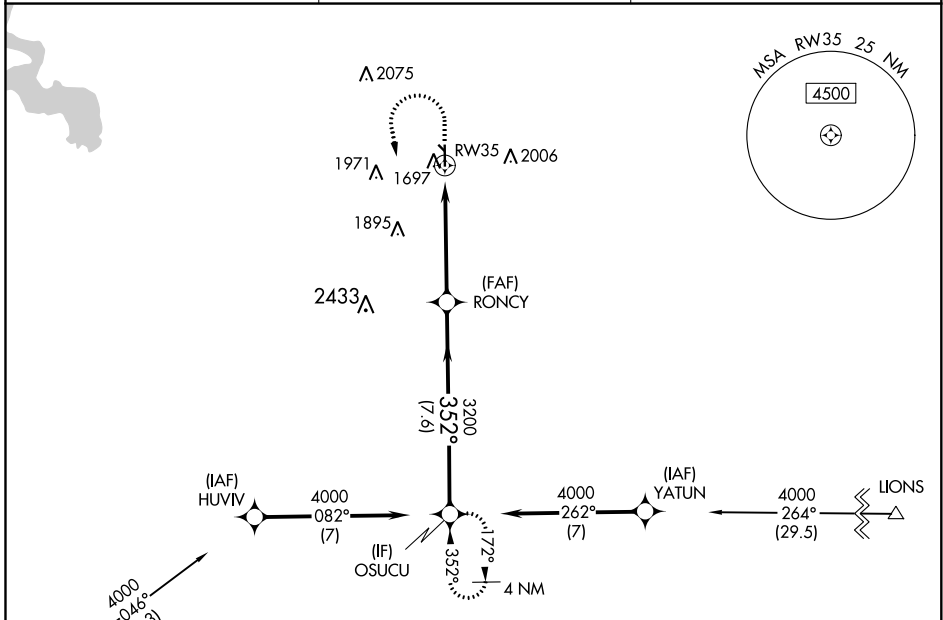

SC-1, 25 FEB 2021 to 25 MAR 2021

SC-1, 25 FEB 2021 to 25 MAR 2021

ELEV 1616		TDZE 1616	
2400	4000	OSUCU	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).
*LNAV only.		OSUCU	
CATEGORY	A	B	C
LPV DA	1866-7/8	250 (300-7/8)	NA
LNAV/VNAV DA	1870-7/8	254 (300-7/8)	NA
LNAV MDA	2040-1 424 (500-1)	2040-1 424 (500-1 1/4)	NA
<b>C</b> CIRCLING	2100-1 484 (500-1)	2220-1 604 (700-1)	2320-2 704 (800-2)

