

WAAS CH <b>65817</b> <b>W33A</b>	APP CRS <b>330°</b>	Rwy Idg <b>10702</b> TDZE <b>17</b> Apt Elev <b>17</b>
--	------------------------	--

# RNAV (GPS) RWY 33



CHENNAULT INTL (CWF')

RNP APCH.

**⚠** Baro-VNAV NA when using Lake Charles Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 49°C. VDP NA when using Lake Charles Rgnl altimeter setting. When local altimeter setting not received, use Lake Charles ASR Rgnl altimeter setting: increase LPV DA to 232 feet; increase LNAV/VNAV DA to 510 feet; increase all MDA 20 feet and LNAV visibility Cat C 3/8 SM and Circling Cat D 1/4 SM.

MISSED APPROACH: Climb to 2000 direct CEVKU and hold.

ATIS <b>120.0</b>	LAKE CHARLES APP CON * <b>119.8 282.3</b>	CHENNAULT TOWER * <b>124.2 (CTAF) 0 290.4</b>	GND CON <b>121.65 275.8</b>	UNICOM <b>122.95</b>
----------------------	--	--	--------------------------------	-------------------------

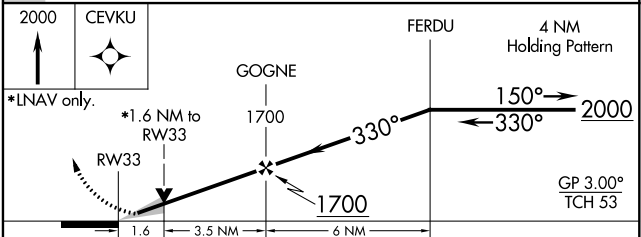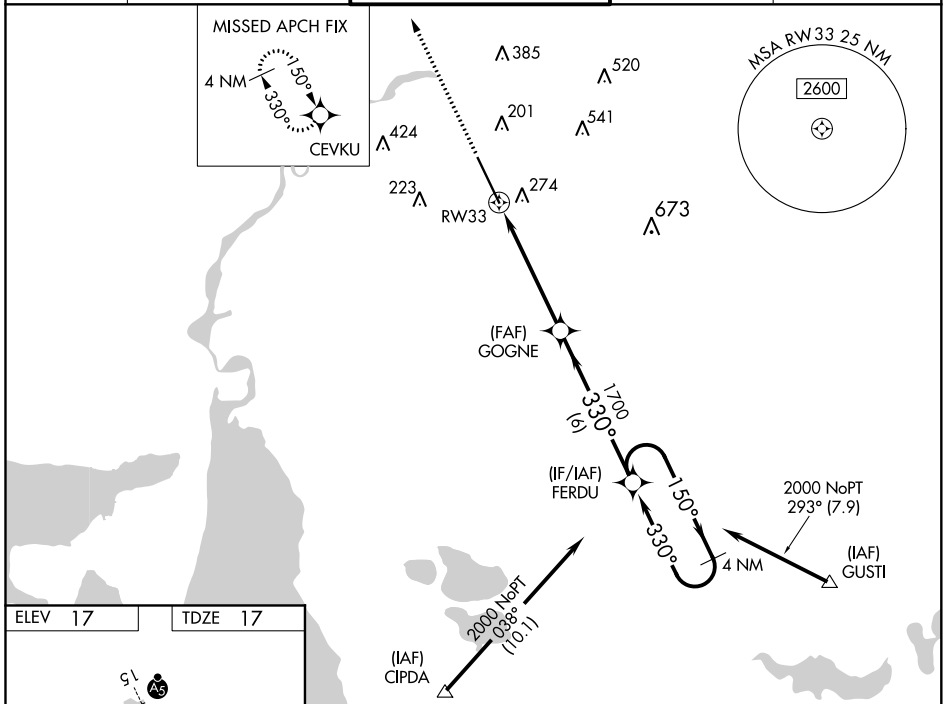

CATEGORY	A	B	C	D
LPV DA		217-3/4	200 (200-3/4)	
LNAV/VNAV DA		494-13/4	477 (500-13/4)	
LNAV MDA	580-1	563 (600-1)	580-15/8 563 (600-15/8)	580-13/4 563 (600-13/4)
<b>C</b> CIRCLING	640-1	623 (700-1)	640-13/4 623 (700-13/4)	740-21/4 723 (800-21/4)

SC-4, 25 FEB 2021 to 25 MAR 2021

SC-4, 25 FEB 2021 to 25 MAR 2021