



WAAS CH 56431 W18A	APP CRS 177°	Rwy Idg TDZE Apt Elev	6327 1073 1077
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 18



DUBUQUE RGNL (DBQ)

RNP APCH.	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -28°C or above 54°C. When local altimeter setting not received, use Monticello altimeter setting and increase all DA 88 feet and all MDA 100 feet, increase LPV all Cats visibility to 1 1/8 mile, increase LNAV/VNAV all Cats 1/4, LNAV Cat C and D and Circling Cat C visibility 1/4 mile. Baro-VNAV and VDP NA when using Monticello altimeter setting.	MISSED APPROACH: Climb to 2700 direct DIVEG and hold.
-----------	--	---

ATIS 127.25	CHICAGO CENTER 133.95 281.4	DUBUQUE TOWER * 119.5 (CTAF) 0 254.4	GND CON 121.8	UNICOM 122.95
-----------------------	---------------------------------------	--	-------------------------	-------------------------

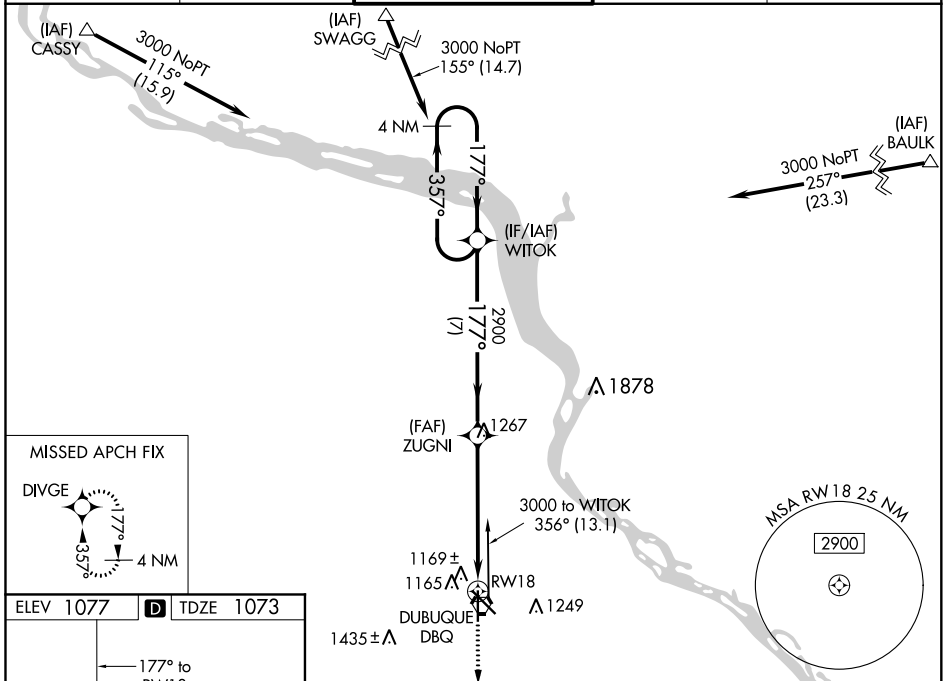

ELEV 1077	D TDZE 1073
-----------	-------------

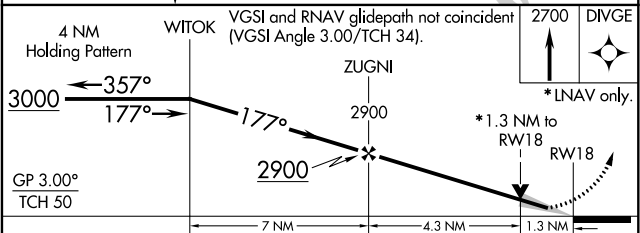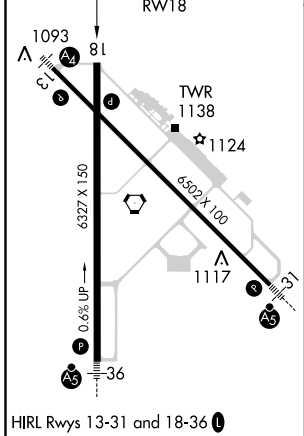

CATEGORY	A	B	C	D
LPV DA		1323-3/4	250 (300-3/4)	
LNAV/VNAV DA		1332-7/8	259 (300-7/8)	
LNAV MDA	1520-1	447 (500-1)	1520-1 3/8	447 (500-1 3/8)
CIRCLING	1580-1	503 (600-1)	1600-1 1/2 523 (600-1 1/2)	1800-2 1/4 723 (800-2 1/4)

NC-3, 25 FEB 2021 to 25 MAR 2021

NC-3, 25 FEB 2021 to 25 MAR 2021