RNAV (GPS) RWY 2R

DUPAGE (DPA)

WAAS	APP CRS	Rwy Idg	6451
CH 45531	015°	TDZE	751
W02A		Apt Elev	759

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Aurora altimeter setting and increase all DA 37 feet and all MDA 40 feet; increase LNAV/VNAV all Cats visibility ¼ mile and LNAV Cat C/D visibility ⅛ mile. VDP and Baro-VNAV NA when using Aurora altimeter setting. Circling Rwy 15, 28, 33 NA at night.

MISSED APPROACH: Climb to 1300 then climbing left turn to 3000 direct NUELG and hold.

ATIS	CHICAGO APP CON	DUPAGE TOWER	GND CON	CLNC DEL
132.075	133.5 349.0	120.9 257.8	121.8	119.75

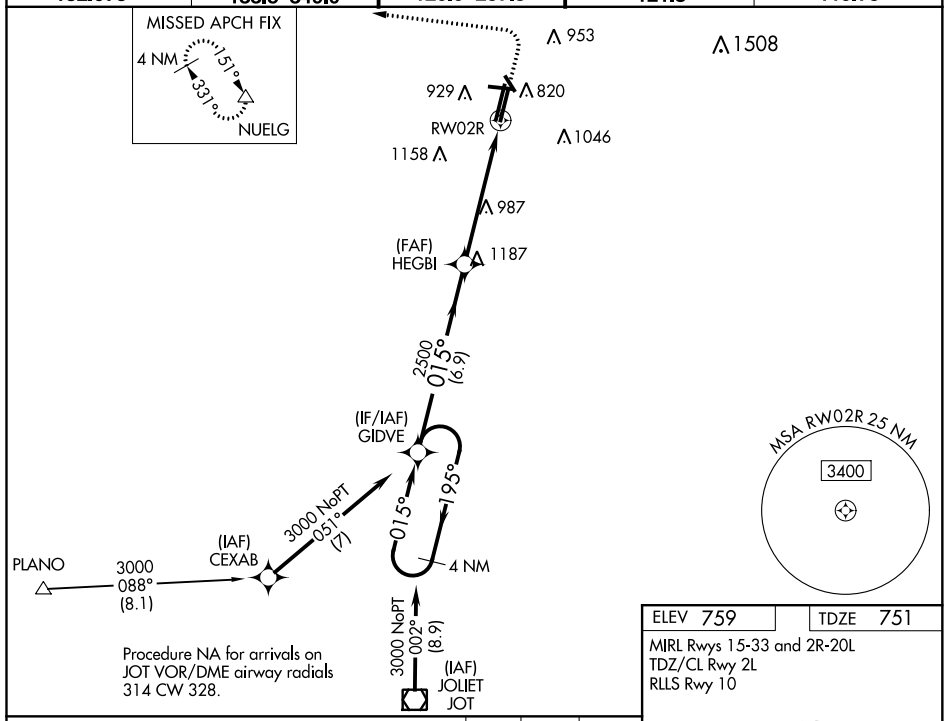

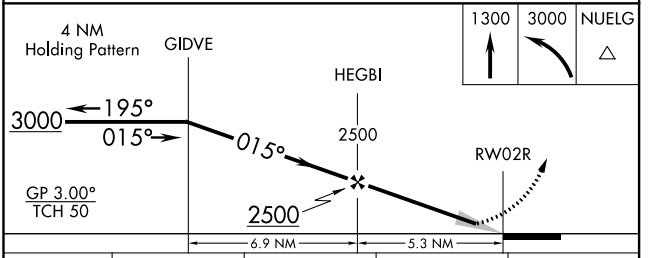

CATEGORY	A	B	C	D
LPV DA	1001-1	250 (300-1)		
LNAV/VNAV DA	1111-1⅛	360 (400-1⅛)		
LNAV MDA	1240-1	489 (500-1)	1240-1⅜	489 (500-1⅜)
CIRCLING	1260-1	501 (600-1)	1360-1¾ 601 (700-1¾)	1360-2 601 (700-2)

ELEV 759 TDZE 751

MIRL Rwys 15-33 and 2R-20L
TDZ/CL Rwy 2L
RLLS Rwy 10

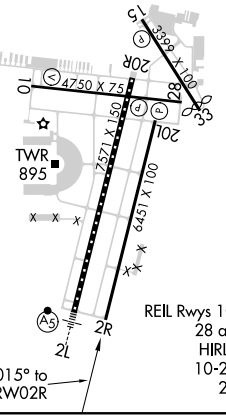

EC-3, 25 FEB 2021 to 25 MAR 2021
EC-3, 25 FEB 2021 to 25 MAR 2021