

WAAS CH 93627 W30A	APP CRS 300°	Rwy Idg TDZE 1456 Apt Elev 1456	5596 1456 1456
--	------------------------	---	---


RNAV (GPS) RWY 30

ELY MUNI (E.L.O)



⚠ Baro-VNAV NA when using Cook altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 34°C (93°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Cook altimeter setting and increase all DA/MDA 100 feet; increase LPV visibility ½ mile all Cats, LNAV/VNAV visibility ¾ mile all Cats, and LNAV Cat C/D visibility ¼ mile.

MISSED APPROACH: Climb to 4100 direct PUXIE and hold.

AWOS-3 132.025	MINNEAPOLIS CENTER 127.9 281.45	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

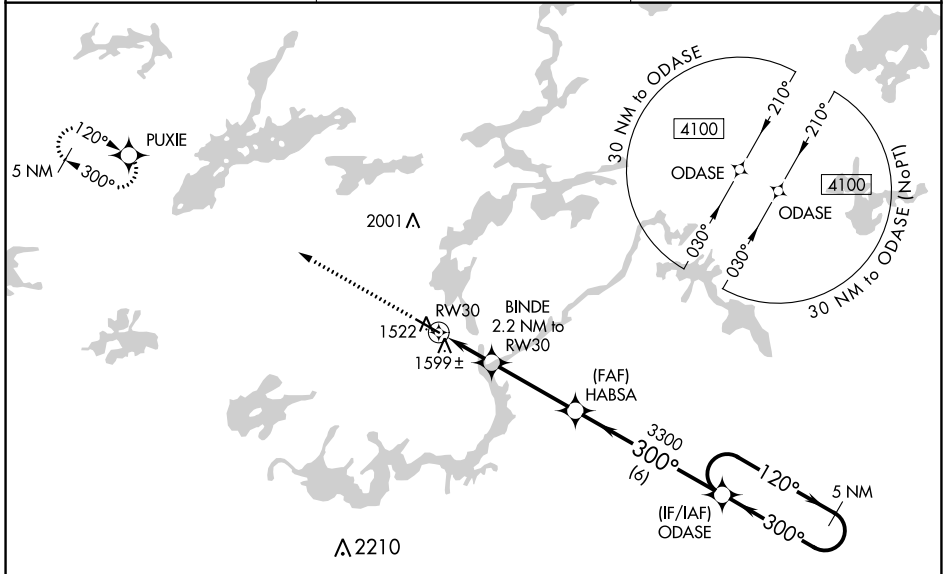

ELEV 1456	TDZE 1456
-----------	-----------

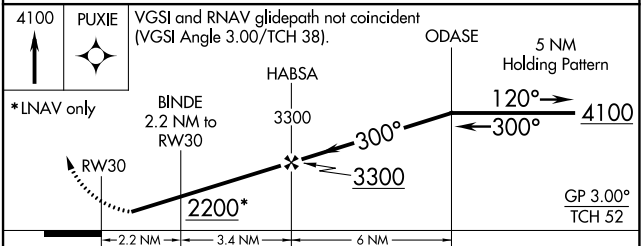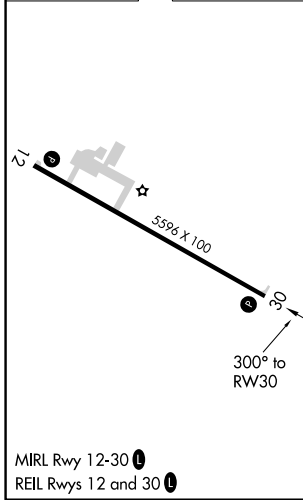

CATEGORY	A	B	C	D
LPV DA		1706-1	250 (300-1)	
LNAV/VNAV DA		1780-1	324 (400-1)	
LNAV MDA	1860-1	404 (500-1)	1860-1½	404 (500-1½)
CIRCLING	1920-1	464 (500-1)	1940-1½ 484 (500-1½)	2020-2 564 (600-2)