ILS or LOC RWY 23

FREDERICK MUNI (FDK)

LOC I-FDK	APP CRS	Rwy Idg	5819
110.3	229°	TDZE	297
		Apt Elev	306

Circling Rwy 30 NA at night. Rwy 23 helicopter visibility reduction below ¾ NA. For inop ALS, increase S-ILS 23 Cat A/B visibility to 1⅛ SM. For inop ALS, increase S-LOC 23 Cat C/D visibility to 2½ SM. ZIBAT fix minimums: Inop table does not apply to S-LOC 23 Cats C/D.

ODALS

MISSED APPROACH: Climb to 1300 then climbing left turn to 2800 on FDK VOR R-048 to NUMBE INT and hold.

ATIS	POTOMAC APP CON		FREDERICK TOWER ★	GND CON	CLNC DEL	CLNC DEL	UNICOM
124.875	125.525	291.625	132.4 (CTAF) L	121.975	121.975	126.9 (When twr closed)	122.95

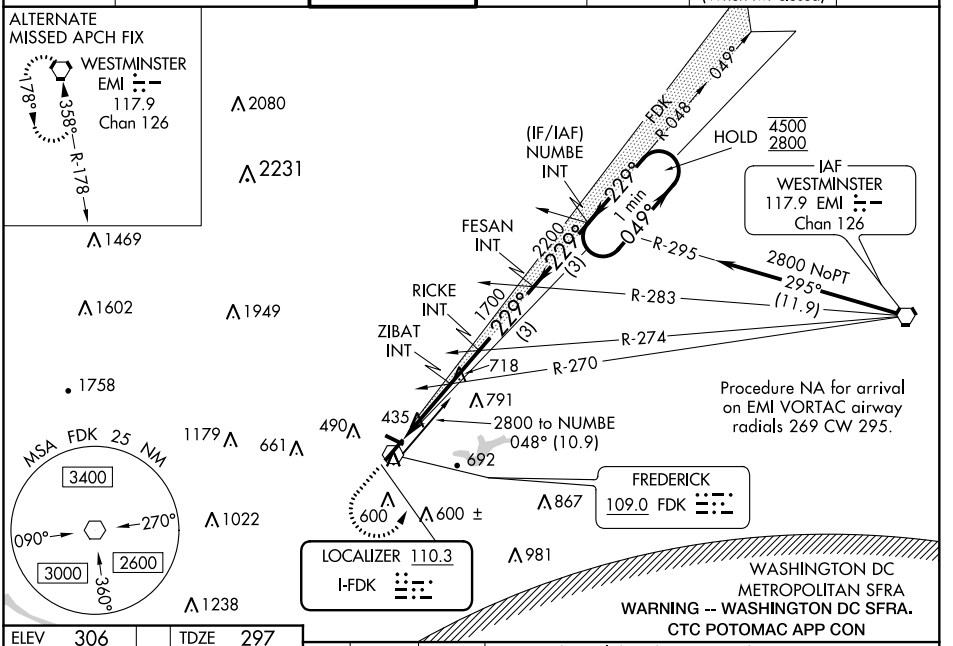

NE-3, 25 FEB 2021 to 25 MAR 2021

NE-3, 25 FEB 2021 to 25 MAR 2021

ELEV 306 TDZE 297

229° 4.3 NM from FAF

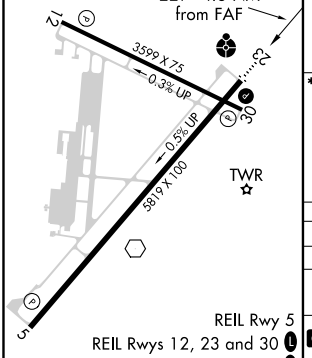

REIL Rwy 5
REIL Rwys 12, 23 and 30 L
HIRL Rwy 5-23 L
MIRL Rwy 12-30 L

FAF to MAP 4.3 NM					
Knots	60	90	120	150	180
Min:Sec	4:18	2:52	2:09	1:43	1:26

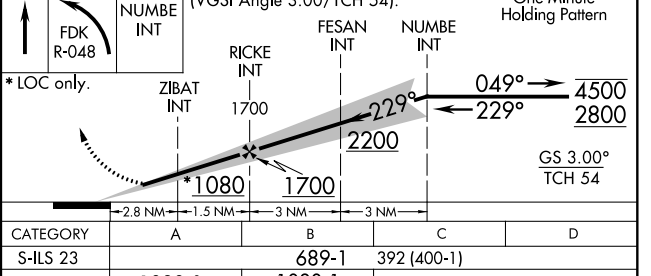

CATEGORY	A	B	C	D
S-ILS 23		689-1	392 (400-1)	
S-LOC 23	1080-¾ 783 (800-¾)	1080-1 783 (800-1)	1080-2	783 (800-2)
C CIRCLING	1080-1 774 (800-1)	1080-1¼ 774 (800-1¼)	1100-2½ 794 (800-2½)	1140-2¾ 834 (900-2¾)
ZIBAT FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)				
S-LOC 23	1020-¾ 723 (800-¾)		1020-2	723 (800-2)
C CIRCLING	1020-1 714 (800-1)		1100-2¼ 794 (800-2¼)	1140-2¾ 834 (900-2¾)