

WAAS CH <b>53329</b> <b>W12A</b>	APP CRS <b>119°</b>	Rwy Idg TDZE <b>1516</b> Apt Elev <b>1516</b>	<b>4499</b>
--	------------------------	---	-------------


# RNAV (GPS) RWY 12

CLEARFIELD-LAWRENCE (FIG)

**⚠** DME/DME RNP-0.3 NA. Helicopter visibility reduction below 3/4 SM NA. VDP NA with Dubois Rgnl altimeter setting. When local altimeter setting not received, use Dubois Rgnl altimeter setting and increase all MDA 100 feet, increase LP Cat B visibility 1/4 mile and Cat C visibility 1/8 mile, increase LNAV Cat C visibility 1/2 mile and increase Circling Cats A/C visibility 1/4 mile.

**⚠** MISSED APPROACH: Climb to 4000 direct EBUME and hold.



ASOS <b>119.275</b>	NEW YORK CENTER <b>134.8 338.3</b>	UNICOM <b>122.725 (CTAF)</b> <b>Ⓛ</b>
------------------------	---------------------------------------	--

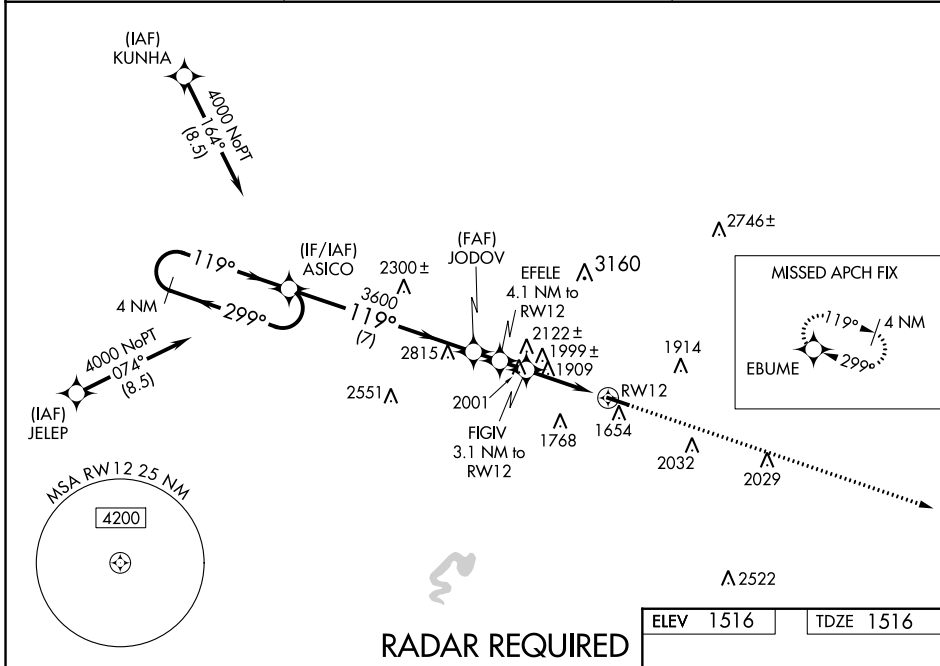

NE-4, 25 FEB 2021 to 25 MAR 2021

NE-4, 25 FEB 2021 to 25 MAR 2021

## RADAR REQUIRED

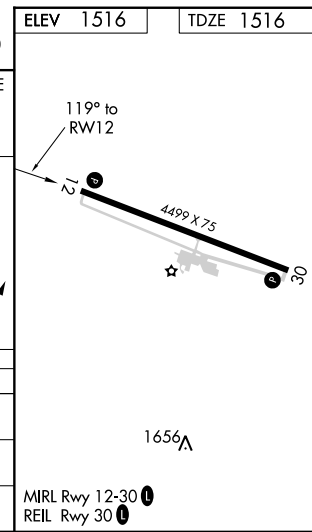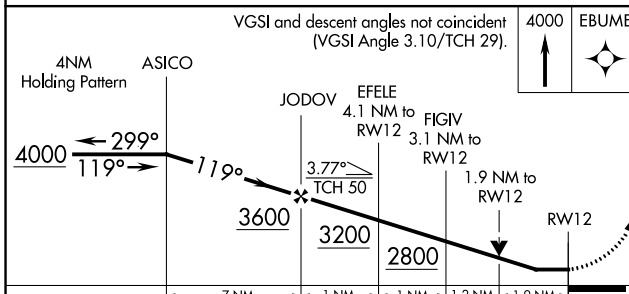

CATEGORY	A	B	C	D
LP MDA	2160-1	644 (700-1)	2160-1 7/8 644 (700-1 7/8)	NA
LNAV MDA	2260-1 744 (800-1)	2260-1 1/4 744 (800-1 1/4)	2260-2 744 (800-2)	NA
CIRCLING	2260-1 744 (800-1)	2260-1 1/4 744 (800-1 1/4)	2260-2 1/4 744 (800-2 1/4)	NA