


# RAZORBACK THREE DEPARTURE

ATIS  
119.575  
GND CON  
121.8  
DRAKE TOWER \*  
128.0 (CTAF) 371.9  
RAZORBACK DEP CON \*  
121.0 244.575

**TAKEOFF MINIMUMS**  
Rwy 16: 400-2 with minimum climb of 310' per NM to 2900  
or standard with minimum climb of 530' per NM to 2200.  
Rwy 34: 300-1 or standard with minimum climb of 680' per  
NM to 1700.

**TOP ALTITUDE:  
5000**

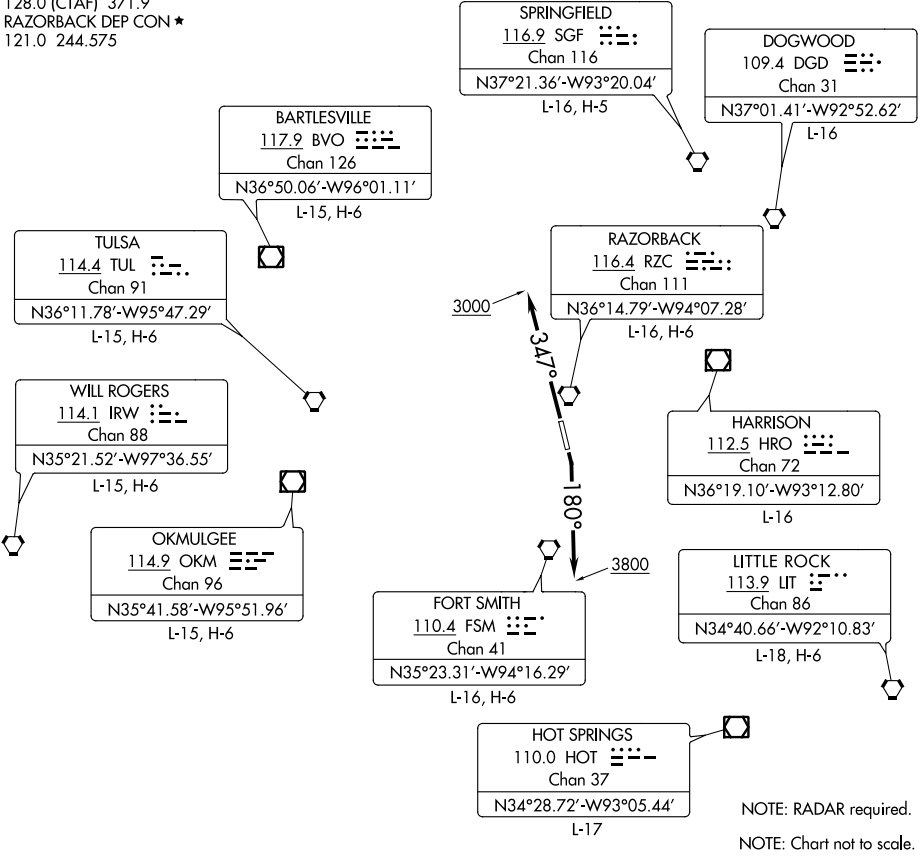

NOTE: RADAR required.  
NOTE: Chart not to scale.

SC-1, 25 FEB 2021 to 25 MAR 2021

SC-1, 25 FEB 2021 to 25 MAR 2021



## DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 16: Climbing right turn heading 180° to 3800 thence. . . .  
TAKEOFF RWY 34: Climb heading 347° to 3000 thence. . . .

. . . .expect RADAR vectors to filed/assigned route. Climb and maintain 5000 or lower assigned altitude. Expect clearance to filed altitude/flight level ten minutes after departure.

LOST COMMUNICATIONS: If communications are not established within 2 minutes after departure, climb and maintain 5000 feet; leaving 3500 feet proceed direct FSM VORTAC, then proceed on course.

# RAZORBACK THREE DEPARTURE