

ILS or LOC RWY 26L

GERALD R FORD INTL (G.R.R.)


LOC I-GRR 109.7	APP CRS 267°	Rwy Idg 10001
		TDZE 790
		Apt Elev 794

ASR



For inop MALS when using GLGHR INT minimums, increase S-LOC 26L Cat D visibility to RVR 5000. For inop MALS when using Holland altimeter setting, increase S-ILS 26L all Cats visibility to RVR 5000.
****RVR 1800 authorized with the use of FD or AP or HUD to DA.**

MALS


MISSED APPROACH:
 Climb to 1300 then climbing left turn to 3000 direct VIO VOR/DME and hold.



ATIS 118.725	GREAT LAKES APP CON * 128.4 257.6	GRAND RAPIDS TOWER * 135.65 (CTAF) 0 339.8	GND CON 121.8	CLNC DEL 119.3	UNICOM 122.95
------------------------	---	--	-------------------------	--------------------------	-------------------------

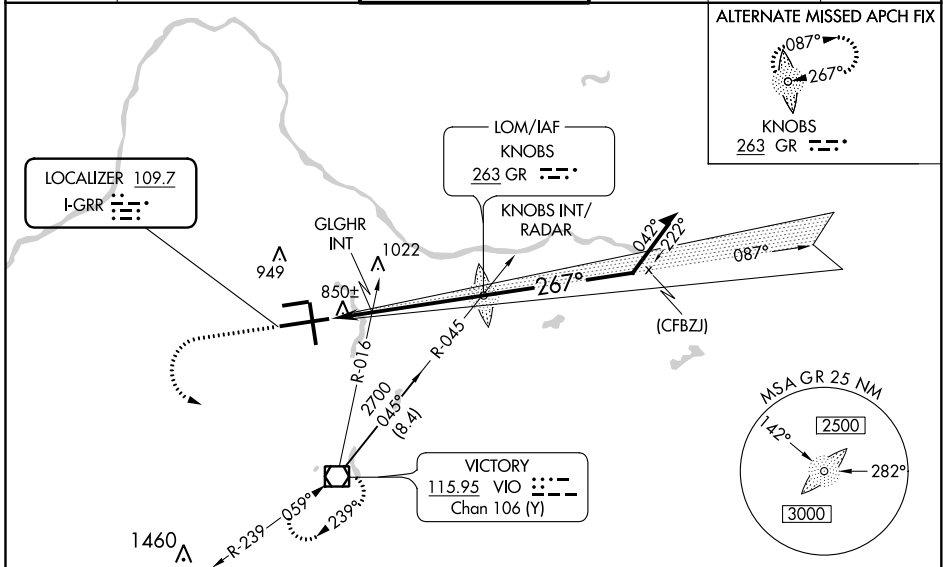


ELEV 794	D	TDZE 790
----------	----------	----------

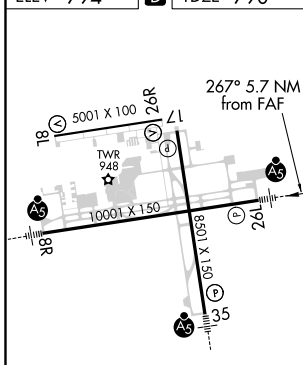

MIRL Rwy 8L-26R
 REIL Rwys 8L, 17 and 26R
 HIRL Rwys 8R-26L and 17-35

FAF to MAP 5.7 NM

Knots	60	90	120	150	180
Min:Sec	5:42	3:48	2:51	2:17	1:54

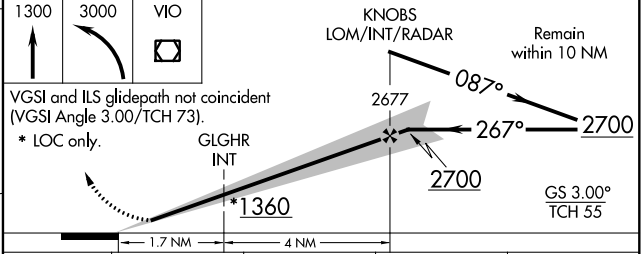

CATEGORY	A	B	C	D
S-ILS 26L**	990/24 200 (200-½)			
S-LOC 26L	1360/24	570 (600-½)	1360/50 570 (600-1)	1360/60 570 (600-1½)
C CIRCLING	1360-1	566 (600-1)	1360-1½ 566 (600-1½)	1360-2 566 (600-2)
GLGHR INT MINIMUMS (DUAL VOR RECEIVERS REQUIRED)				
S-LOC 26L	1120/24 330 (400-½)		1120/40 330 (400-¾)	
C CIRCLING	1260-1	466 (500-1)	1340-1½ 546 (600-1½)	1360-2 566 (600-2)

EC-1, 25 FEB 2021 to 25 MAR 2021

EC-1, 25 FEB 2021 to 25 MAR 2021