WAAS	APP CRS	Rwy Idg	5018
CH 40330	285°	TDZE	50
W28A		Apt Elev	52

RNAV (GPS) RWY 28L

HAYWARD EXECUTIVE (HWD)

RNP APCH.

Baro-VNAV NA. When local altimeter setting not received, use Oakland altimeter setting and increase all DA and MDA 20 feet, and increase all LNAV/VNAV and LNAV Cats C and D visibility ⅛ mile. Circling NA north of Rwy 10L-28R. Rwy 28L: Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 600 then climbing right turn to 2100 direct OAK VOR/DME and hold.

ATIS	NORCAL APP CON	HAYWARD TOWER ★	GND CON	CLNC DEL	UNICOM
126.7	124.4 351.8	120.2 (CTAF) L 257.8	121.4	128.05	122.95

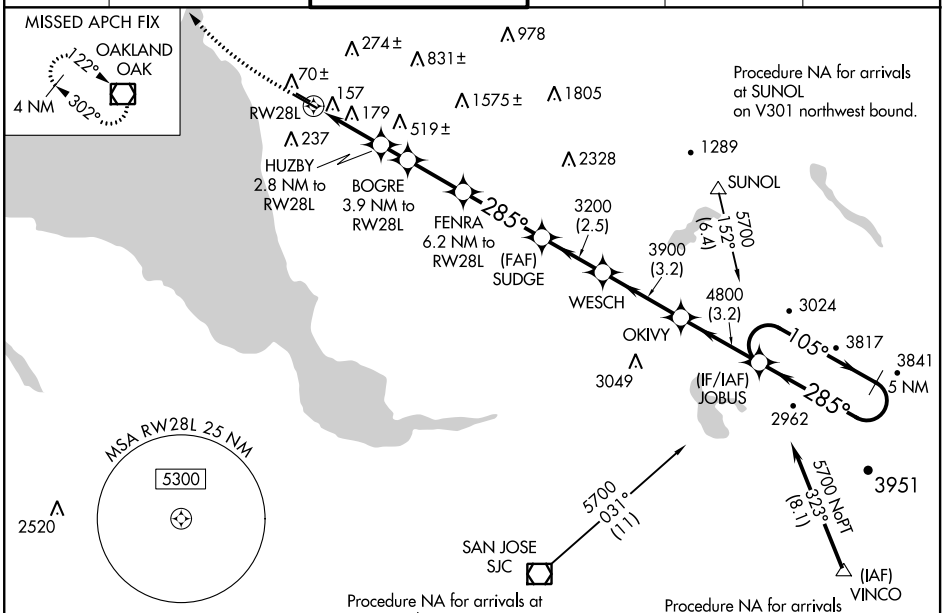

ELEV	52	TDZE	50



MIRL Rwy 10R-28L L
MIRL Rwy 10L-28R
REIL Rwys 10R and 28L

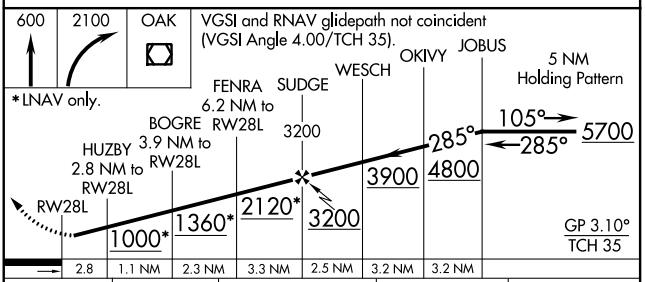

CATEGORY	A	B	C	D
LPV DA	348-1 298 (300-1)			
LNAV/VNAV DA	400-1⅛ 350 (400-1⅛)			
LNAV MDA	460-1 410 (500-1)		460-1⅛ 410 (500-1⅛)	
CIRCLING	540-1 488 (500-1)		540-1½ 488 (500-1½)	620-2 568 (600-2)

SW-2, 25 FEB 2021 to 25 MAR 2021
SW-2, 25 FEB 2021 to 25 MAR 2021