WAAS	APP CRS	Rwy Idg	7301
CH 65929	016°	TDZE	1321
W01B		Apt Elev	1333

RNAV (GPS) RWY 1R

WICHITA DWIGHT D EISENHOWER NATIONAL (ICT)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). For inoperative MALSR, increase LPV Cat E visibility to ¾ , LNAV/VNAV Cat E visibility to 1⅛ and LNAV Cat C, D and E visibility to 1⅛ . DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Simultaneous approach authorized with ILS or LOC RWY 1L and ILS RWY 1L (CAT II). Use of FD or AP providing RNAV track guidance required during simultaneous operations. # RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 3600 direct JAXSU and hold.

ATIS	WICHITA APP CON	WICHITA TOWER	GND CON	CLNC DEL
125.15	126.7 353.5	118.2 257.8	121.9 348.6	125.7

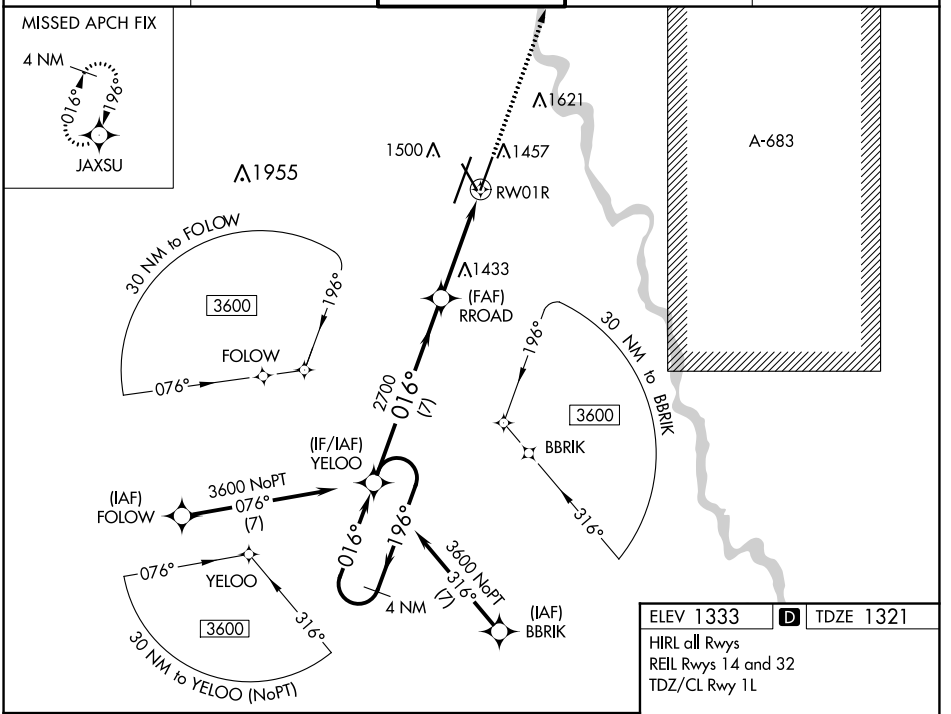

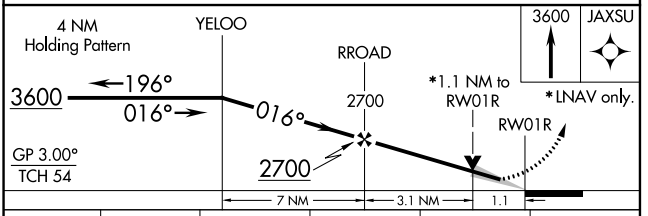

CATEGORY	A	B	C	D	E
LPV DA#	1521/24 200 (200-½)				
LNAV/VNAV DA	1660/32 339 (400-⅝)				
LNAV MDA	1740/24 419 (500-½)		1740/40 419 (500-¾)		
C CIRCLING	1800-1 467 (500-1)		1980-1¾ 647 (700-1¾)	1980-2 647 (700-2)	2000-2¼ 667 (700-2¼)

ELEV 1333 D TDZE 1321

HIRL all Rwys
REIL Rwys 14 and 32
TDZ/CL Rwy 1L

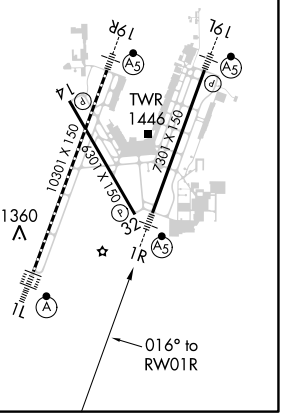

NC-2, 25 FEB 2021 to 25 MAR 2021
NC-2, 25 FEB 2021 to 25 MAR 2021