


LOC/DME I-TLK	APP CRS	Rwy Idg	9093
111.5	134°	TDZE	13
Chan 52		Apt Elev	13

ILS or LOC RWY 13L

JOHN F KENNEDY INTL (JFK)


RNAV 1-GPS or RADAR required for procedure entry.	ALSF-2	MISSED APPROACH: Climb to 600 then climbing left turn to 4000 direct DPK VOR/DME and hold.
From COVIR, KMCHI, BUZON: RNAV-1 GPS required.		
For inop ALS, increase S-LOC 13L Cat C/D visibility to 1/8 SM.		

D-ATIS (ARR/DEP) (ARR-NE) (ARR-SW)	NEW YORK APP CON	KENNEDY TOWER	GND CON	CLNC DEL	CPDLC
128.725 117.7 115.4	128.125 269.0	Rwys 4R/22L and 13L/31R 119.1 281.55 Rwys 4L/22R and 13R/31L 123.9 281.55	121.9 348.6	135.05 348.6	

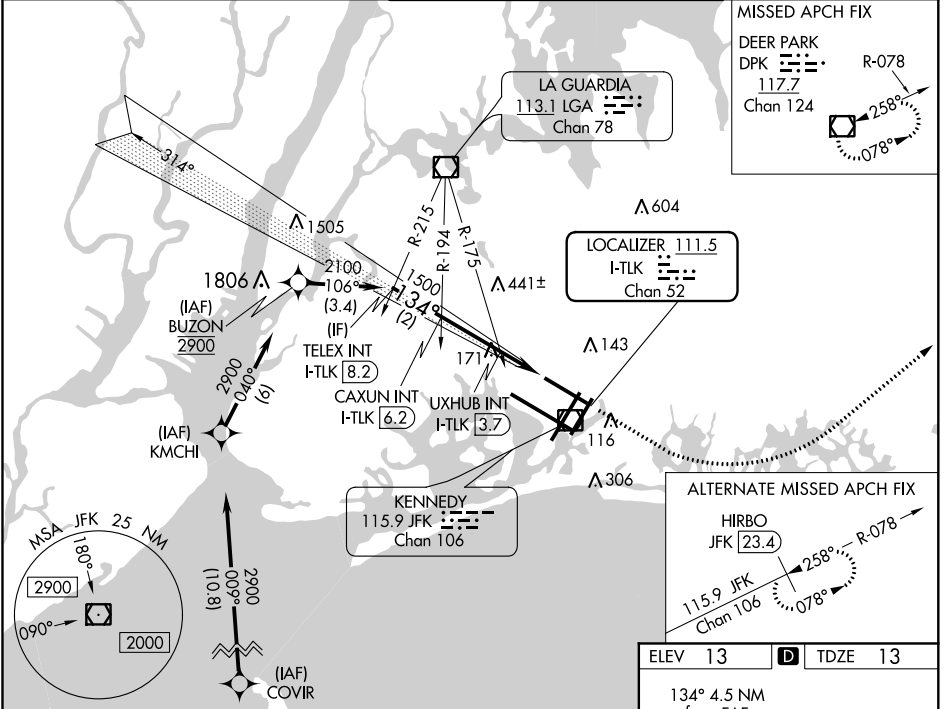

NE-2, 25 FEB 2021 to 25 MAR 2021

NE-2, 25 FEB 2021 to 25 MAR 2021

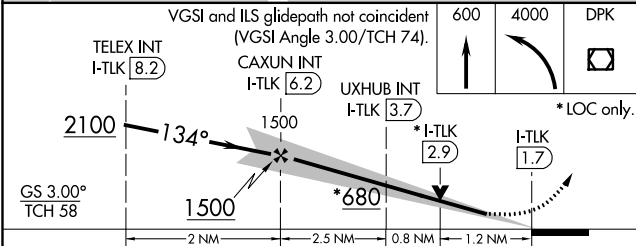

ELEV 13	TDZE 13
134° 4.5 NM from FAF	
REIL Rwy 4L, RLIS Rwys 13L and 13R, HIRL all Rwys, TDZ/CL Rwys 4L, 4R, 13L, 22L and 31R	
FAF to MAP 4.5 NM	
Knots	60 90 120 150 180
Min:Sec	4:30 3:00 2:15 1:48 1:30

CATEGORY	A	B	C	D
S-ILS 13L	213/18 200 (200-1/2)			
S-LOC 13L	680/24	667 (700-1/2)	680-1 1/2	667 (700-1 1/2)
CIRCLING	680-1	667 (700-1)	680-1 3/4	680-2
			667 (700-3/4)	667 (700-2)
UXHUB FIX MINIMUMS				
S-LOC 13L	440/24	427 (500-1/2)	440/40	427 (500-3/4)
CIRCLING	640-1	627 (700-1)	680-1 3/4	680-2
			667 (700-3/4)	667 (700-2)