




| | | |
|---------------------------|------------------------|---|
| LOC I-MLU 109.5 | APP CRS 042° | Rwy Idg 7505 TDZE 78 Apt Elev 79 |
|---------------------------|------------------------|---|

ILS or LOC RWY 4

MONROE RGNL (MLU)

| | | | |
|--|--|-------|---|
| ADF or DME required for procedure entry. | | MALSR | MISSED APPROACH: Climb to 1800 then climbing right turn to 3000 direct MLU VORTAC and hold. |
| ⚠ Circling Rwy 14 NA at night. For inop ALS, increase S-LOC 4 Cat C/D visibility to 1½ SM. ⚠ UXGOY FIX MINIMUMS: For inop ALS, increase S-LOC 4 Cat C/D visibility to RVR 5500. ASR **RVR 1800 authorized with the use of FD or AP or HUD to DA. # DME from MLU VORTAC. | | | |

| | | | | | |
|-----------------------|---|---|-------------------------|---------------------------|-------------------------|
| ATIS 125.05 | MONROE APP CON * 118.15 290.475 | MONROE TOWER * 118.9 (CTAF) 0 257.8 | GND CON 121.9 | CLNC DEL 121.65 | UNICOM 122.95 |
|-----------------------|---|---|-------------------------|---------------------------|-------------------------|

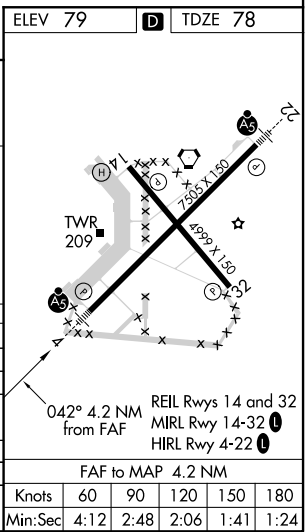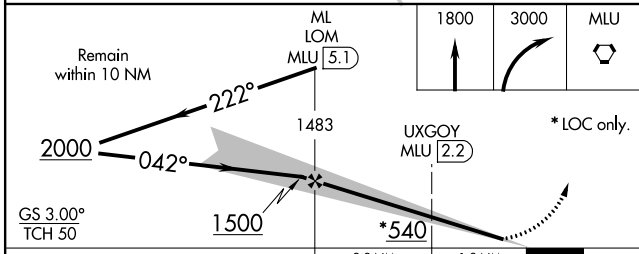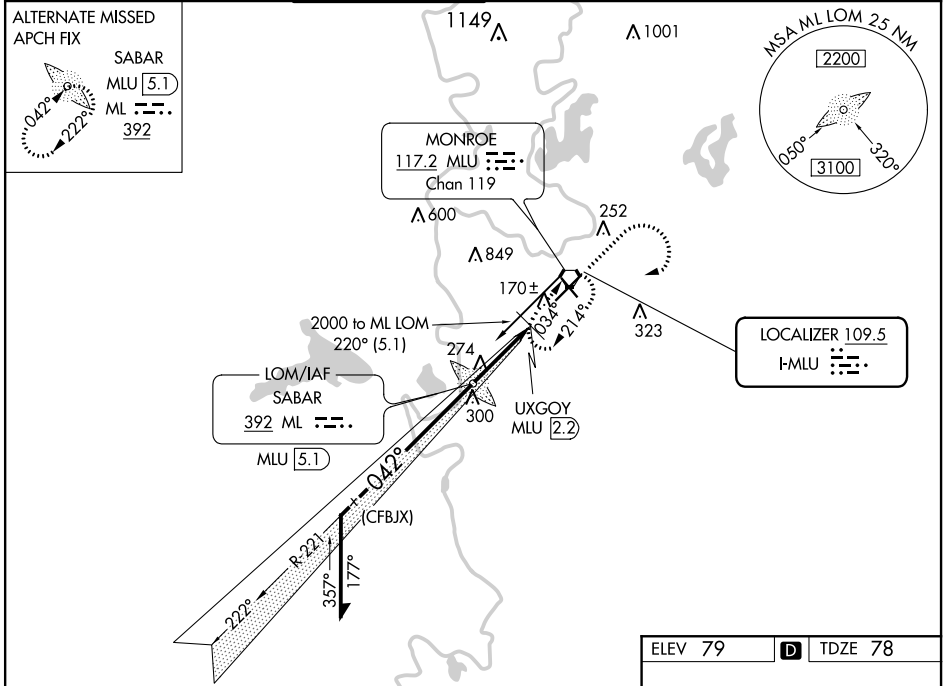

| CATEGORY | A | B | C | D |
|----------------------|----------------------|-------------|------------------------|-------------------------|
| S-ILS 4 | **278/24 200 (200-½) | | | |
| S-LOC 4 | 540/24 | 462 (500-½) | 540/50 | 462 (500-1) |
| C CIRCLING | 580-1 | 501 (600-1) | 740-1¾ 661(700-1¾) | 1160-3 1081 (1100-3) |
| # UXGOY FIX MINIMUMS | | | | |
| S-LOC 4 | 420/24 | 342 (400-½) | 420/30 | 342 (400-¾) |
| C CIRCLING | 580-1 | 501 (600-1) | 740-1¾ 661 (700-1¾) | 1160-3 1081 (1100-3) |

SC-4, 25 FEB 2021 to 25 MAR 2021

SC-4, 25 FEB 2021 to 25 MAR 2021