

WAAS CH 73025 W27A	APP CRS 272°	Rwy Idg 4002 TDZE 925 Apt Elev 925
--	------------------------	---


RNAV (GPS) RWY 27

PORTLAND MUNI (PLD)

NA DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Fort Wayne Intl altimeter setting and increase all MDA 100 ft, LP Cat C visibility $\frac{3}{8}$ mile, LNAV and Circling Cat C visibility to $\frac{1}{4}$ mile. When VGSI inop, Straight-in/Circling Rwy 27 procedure NA at night. When VGSI inop, Circling Rwy 9 NA at night.

MISSED APPROACH:
Climb to 2500 direct DIYEC and hold.



AWOS-3 124.675	FORT WAYNE APP CON 132.15 (SE/NE) 284.6 127.2 (SW/NW) 284.6	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

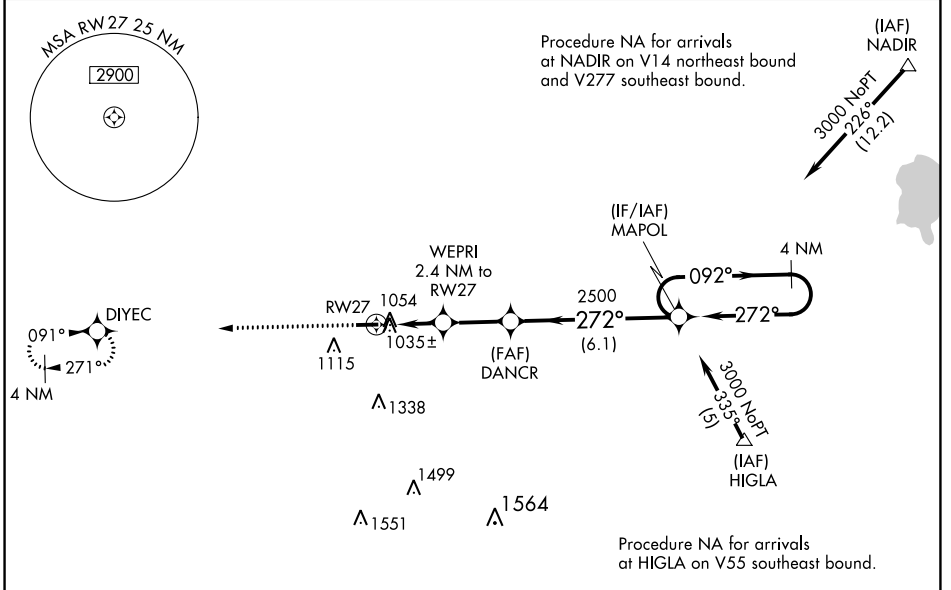

EC-2, 25 FEB 2021 to 25 MAR 2021

EC-2, 25 FEB 2021 to 25 MAR 2021

ELEV 925	TDZE 925
-----------------	-----------------

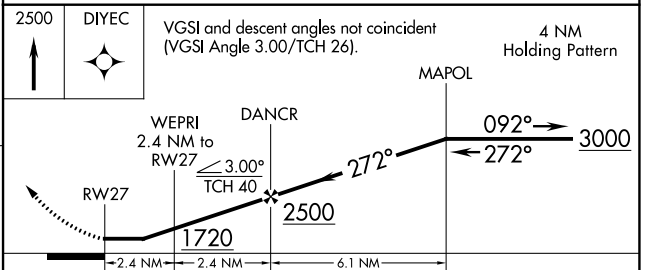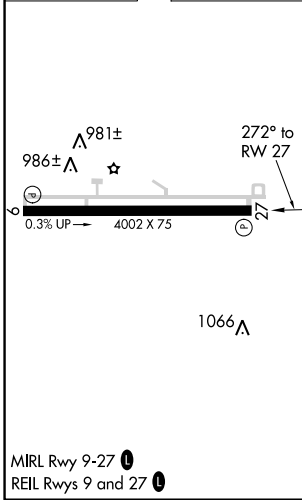

CATEGORY	A	B	C	D
LP MDA	1300-1 375 (400-1)			NA
LNAV MDA	1380-1	455 (500-1)	1380-1 $\frac{3}{8}$ 455 (500-1 $\frac{3}{8}$)	NA
CIRCLING	1480-1	555 (600-1)	1480-1 $\frac{1}{2}$ 555 (600-1 $\frac{1}{2}$)	NA