RNAV (GPS) RWY 8R

PUEBLO MEML (PUB)

WAAS	APP CRS	Rwy Idg	10496
CH 70531	080°	TDZE	4671
W08A		Apt Elev	4729

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 47°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM.

MALSR

MISSED APPROACH: Climb to 7000 direct HELER and hold.

ATIS	DENVER APP CON ★	PUEBLO TOWER ★	GND CON	CLNC DEL	UNICOM
125.25	120.1 290.5	119.1 (CTAF) L 257.8	121.9	120.9	122.95

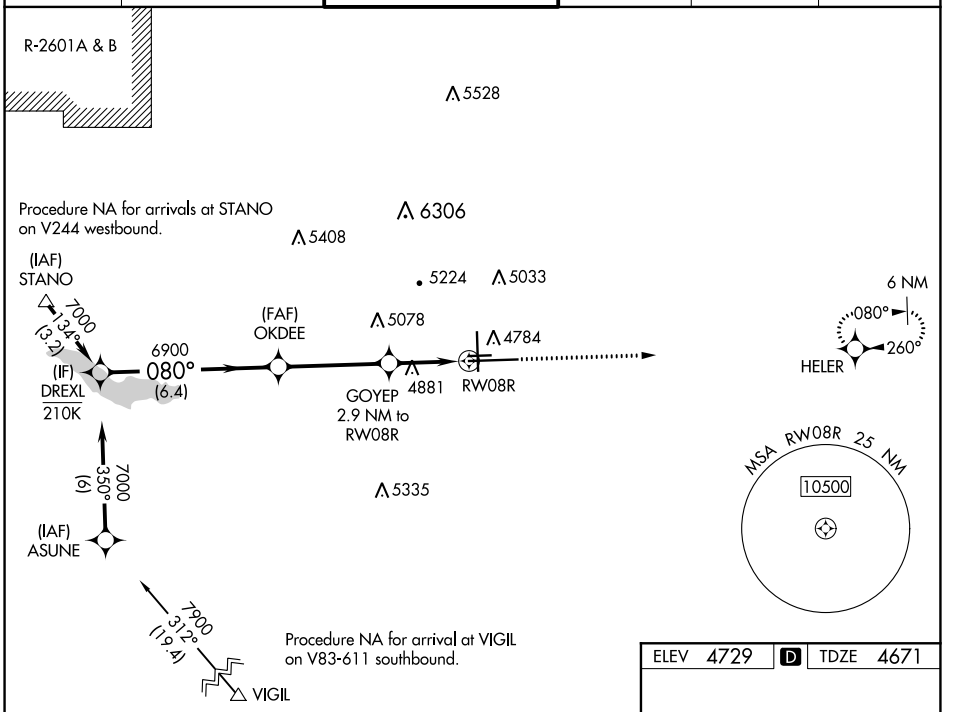

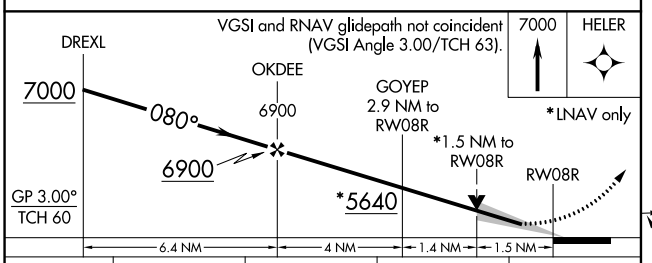

CATEGORY	A	B	C	D
LPV DA	4871-½ 200 (200-½)			
LNAV/VNAV DA	4921-½ 250 (200-½)			
LNAV MDA	5200-½ 529 (500-½)		5200-1 529 (500-1)	
C CIRCLING	5340-1 611 (700-1)		5560-2½ 831 (900-2½)	5800-3 1071 (1100-3)



HIRL Rwy 8R-26L L
MIRL Rwys 17-35 and 8L-26R L
REIL Rwys 8L, 17, 26L, 26R and 35 L

SW-1, 25 FEB 2021 to 25 MAR 2021
SW-1, 25 FEB 2021 to 25 MAR 2021