

# FUNNL THREE DEPARTURE (RNAV)

SC-1, 25 FEB 2021 to 25 MAR 2021


**TOP ALTITUDE:**  
Assigned by ATC

ATIS  
 128.725  
 GND CON  
 121.7  
 WILEY POST TOWER \*  
 126.9 306.9  
 OKE CITY DEP CON  
 124.6 266.8 (South)  
 124.2 336.4 (North)

**TAKEOFF MINIMUMS:**

Rwys 13, 17L/R, 31, 35L/R:

Standard with minimum climb of 500' per NM to 2100.

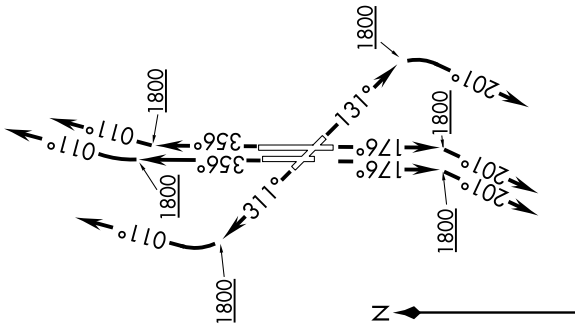

NOTE: RADAR required.  
 NOTE: DME/DME/IRU or GPS required.  
 NOTE: RNAV 1.



**DEPARTURE ROUTE DESCRIPTION**

**TAKEOFF RWY 13:** Climb heading 131° to 1800, then right turn heading 201° or as assigned by ATC, expect RADAR vectors to VOWED. Thence. . . .  
**TAKEOFF RWYS 17L/R:** Climb heading 176° to 1800, then right turn heading 201° or as assigned by ATC, expect RADAR vectors to VOWED. Thence. . . .  
**TAKEOFF RWY 31:** Climb heading 311° to 1800, then right turn heading 011° or as assigned by ATC, expect RADAR vectors to VOWED. Thence. . . .  
**TAKEOFF RWY 35L:** Climb heading 356° to 1800, then heading 011° or as assigned by ATC, expect RADAR vectors to VOWED. Thence. . . .  
**TAKEOFF RWY 35R:** Climb heading 356° to 1800, then right turn heading 011° or as assigned by ATC, expect RADAR vectors to VOWED. Thence. . . .

. . . . on track 080° to FUNNL, then on (transition). Maintain 3000 or as assigned by ATC. Expect filed altitude 10 minutes after departure.

PHARA TRANSITION (FUNNL3.PHARA):

NOTE: Chart not to scale.

# FUNNL THREE DEPARTURE (RNAV)

SC-1, 25 FEB 2021 to 25 MAR 2021