

WAAS CH 78437 W35B	APP CRS 355°	Rwy Idg TDZE Apt Elev	5001 1275 1300
--	------------------------	-----------------------------	---




RNAV (GPS) RWY 35L

WILEY POST (PWA)

ASR DME/DME RNP-0.3 NA. VDP NA when using Will Rogers World altimeter setting. When local altimeter setting not received, use Will Rogers World altimeter setting and increase all MDA 40 feet; increase LP Cat C/D visibility 1/8 mile and Circling Cat C 1/4 mile.


MISSED APPROACH: Climb to 1700 then climbing left turn to 3400 direct IFI VORTAC and hold.

ATIS 128.725	OKE CITY APP CON 124.6 266.8	WILEY POST TOWER ★ 126.9(CTAF) 306.9	GND CON 121.7	UNICOM 122.95
------------------------	--	--	-------------------------	-------------------------

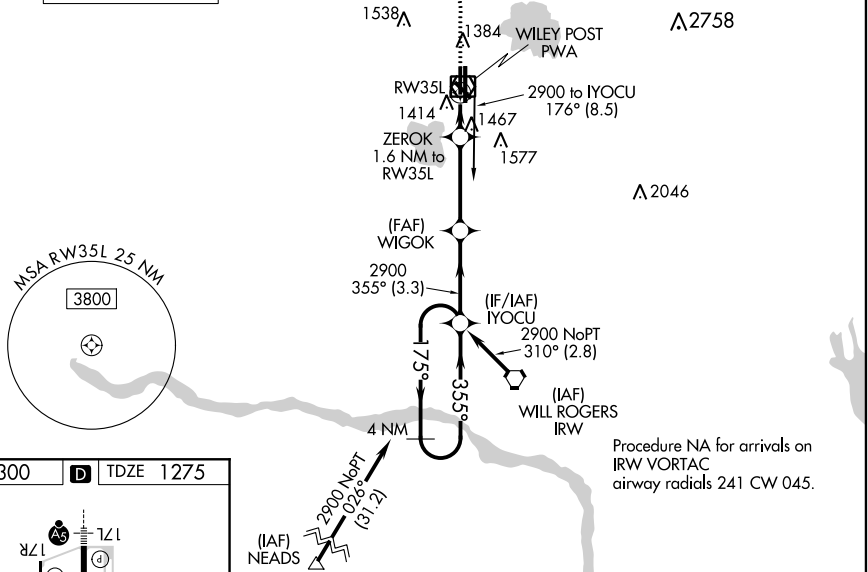

Procedure NA for arrivals on IRW VORTAC airway radials 241 CW 045.

ELEV 1300	D	TDZE 1275
-----------	----------	-----------

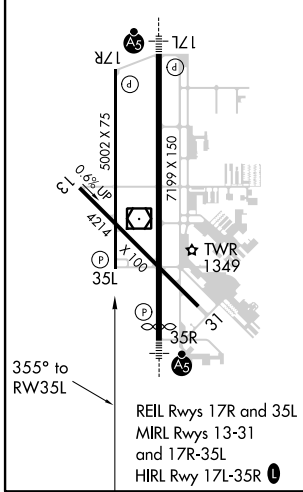

1700	3400	IFI	WIGOK	IYOCU	4 NM Holding Pattern
(IAF) NEADS	2900 NoPT (31-2)	0.26°	ZEROK 1.6 NM to RW35L	355°	175°
	1.1 NM to RW35L	0.5 NM	1820	3.00° TCH 45	2900
	1.1 NM	0.5 NM	3.4 NM	3.3 NM	
CATEGORY	A	B	C	D	
LP MDA	1660-1	385 (400-1)	1660-1/8	385 (400-1/8)	
LNAV MDA	1720-1	445 (500-1)	1720-1/8	445 (500-1/8)	
C CIRCLING	1780-1	480 (500-1)	1880-1/2	1880-2	
			580 (600-1/2)	580 (600-2)	

SC-1, 25 FEB 2021 to 25 MAR 2021

SC-1, 25 FEB 2021 to 25 MAR 2021