RNAV (GPS) RWY 5

SALISBURY-OCEAN CITY WICOMICO RGNL (SBY)

WAAS	APP CRS	Rwy Idg	5000
CH 62820	049°	TDZE	48
W05A		Apt Elev	53

Baro-VNAV NA when using Georgetown altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received use Georgetown altimeter setting and increase all DA 52 feet and all MDA 60 feet; increase LPV all Cats, LNAV/VNAV all Cats, and LNAV Cats C/D visibility ¼ mile.

MISSED APPROACH: Climb to 2000 direct OKKOE and hold.

ASOS	PATUXENT APP CON ★	SALISBURY TOWER ★	GND CON	CLNL DEL ★	UNICOM
118.325	127.95 314.0	119.425 (CTAF) L	123.775	123.775	122.95

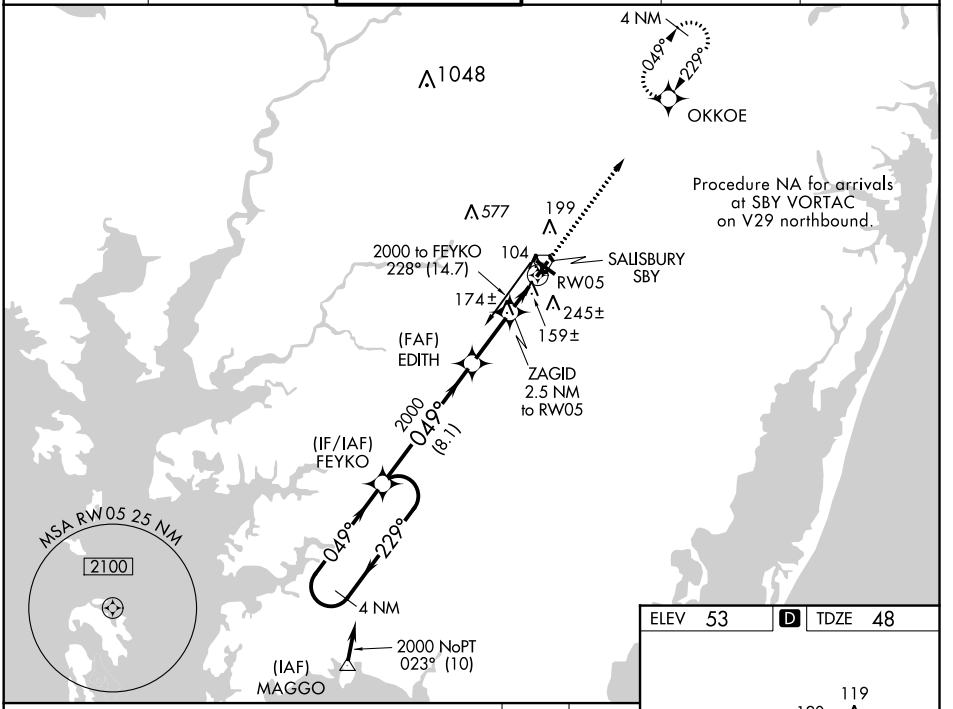

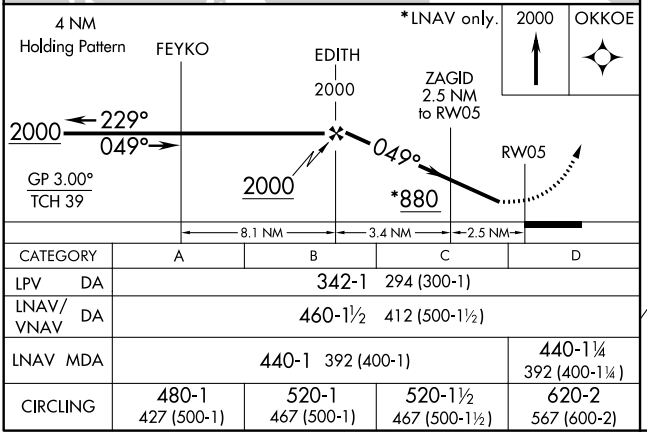

CATEGORY	A	B	C	D
LPV DA	342-1 294 (300-1)			
LNAV/VNAV DA	460-1½ 412 (500-1½)			
LNAV MDA	440-1 392 (400-1)			440-1¼ 392 (400-1¼)
CIRCLING	480-1 427 (500-1)	520-1 467 (500-1)	520-1½ 467 (500-1½)	620-2 567 (600-2)

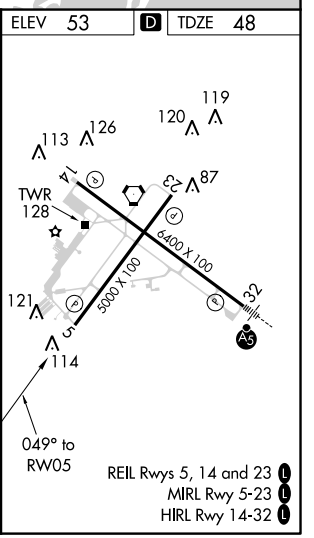

REIL Rwys 5, 14 and 23 L
MIRL Rwy 5-23 L
HIRL Rwy 14-32 L

NE-3, 25 FEB 2021 to 25 MAR 2021
NE-3, 25 FEB 2021 to 25 MAR 2021