


LOC/DME I-SJW 111.3 Chan 50	APP CRS 303°	Rwy ldg TDZE Apt Elev	9003 605 618
---	------------------------	-----------------------------	---



ILS or LOC RWY 30R

ST LOUIS LAMBERT INTL (STL)

RADAR required for procedure entry.		ALSF-2 		MISSED APPROACH: Climb to 1020 then climbing right turn to 3000 direct TOY VORTAC and hold.	
▼ For inop ALS, increase S-ILS 30R Cat E visibility to RVR 4000 and S-LOC 30R Cat C/D/E visibility to 1 3/8 SM. Simultaneous approach authorized with Rwy 29. Simultaneous approach authorized with Rwy 30L requires use of vertical guidance; maintain last assigned altitude until established on glideslope.		GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)		CLNC DEL 119.5 363.1	CPDLC
D-ATIS 125.025 379,925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 120.05 284.6			

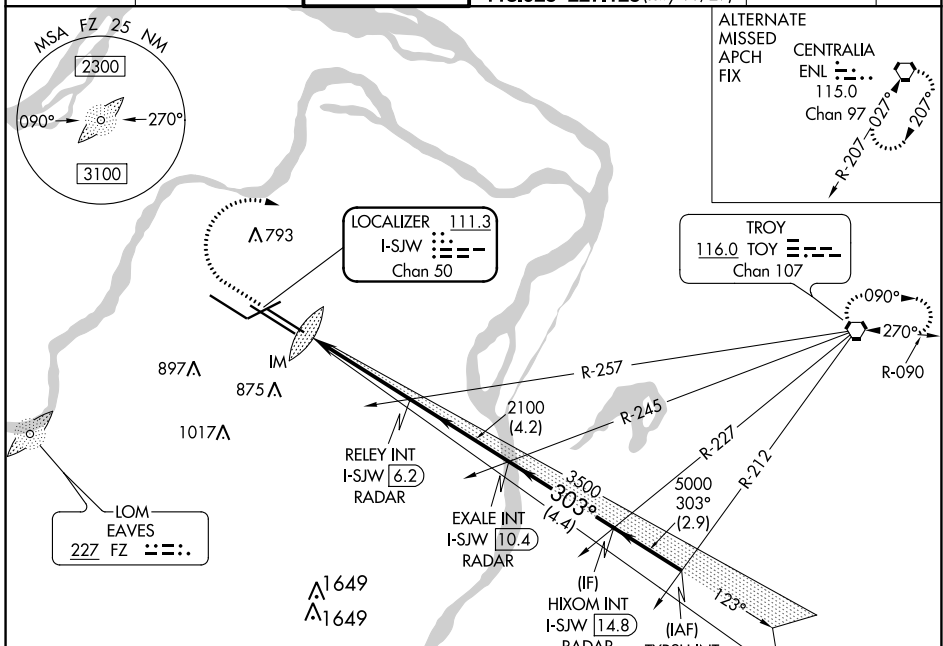

ELEV 618	D TDZE 605
Rwy 6-24 7607 X 150	Rwy 11-29 9001 X 150
Rwy 12L-30R 9003 X 150	Rwy 12R-30L 11019 X 200

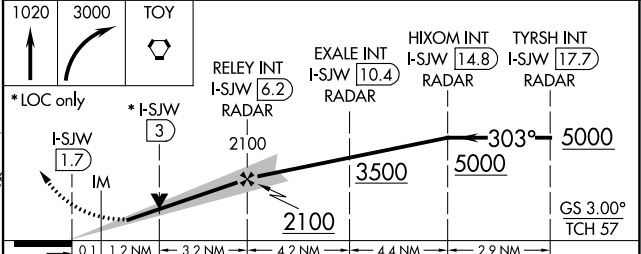

CATEGORY	A	B	C	D	E
S-ILS 30R	805/18 200 (200-1/2)				
S-LOC 30R	1080/24 475 (500-1/2)		1080/50 475 (500-1)		

NC-3, 25 FEB 2021 to 25 MAR 2021

NC-3, 25 FEB 2021 to 25 MAR 2021