RNAV (GPS) Z RWY 28

EAST HAMPTON (HTO)

WAAS CH 49037 W28A	APP CRS 282°	Rwy Idg 4255 TDZE 46 Apt Elev 55

RNP APCH.

Circling to Rwy 16, 34 NA at night. Rwy 28 helicopter visibility reduction below 1 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C. Straight-in and Circling Rwy 28 at night operational VGSI required, remain at or above VGSI glidepath until threshold. Circling Rwy 10 at night operational VGSI required, remain on or above VGSI glidepath until threshold.

MISSED APPROACH: Climb to 2000 direct MATHW and hold.

AWOS-3PT	NEW YORK APP CON	EAST HAMPTON TOWER ★	GND CON	CLNC DEL
118.075	125.975 343.65	125.225 (CTAF) L	121.9	118.95

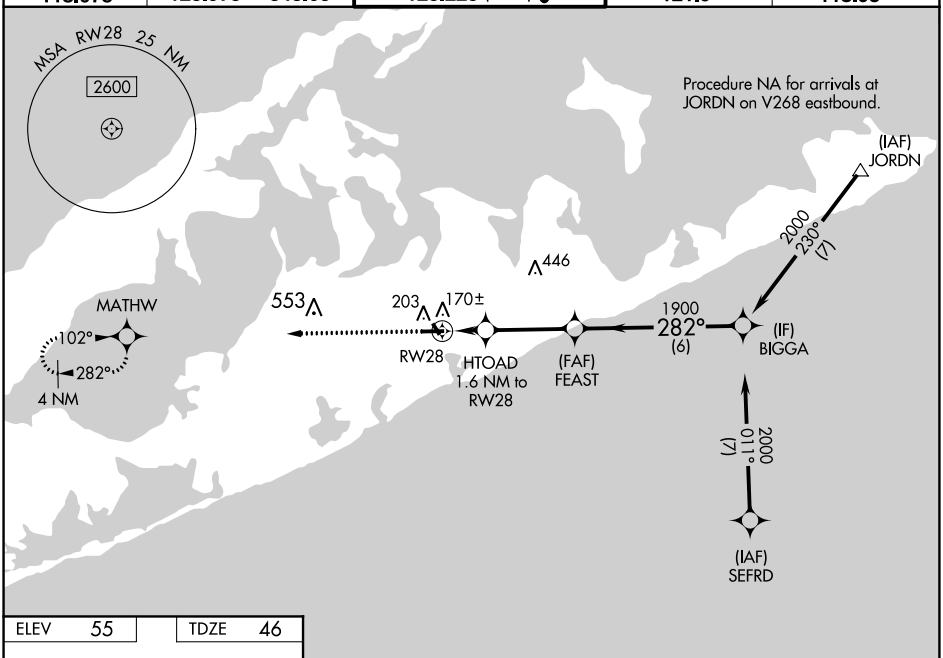

ELEV 55 TDZE 46



MIRL Rwy 10-28 L

REIL Rwys 10 and 28 L ★

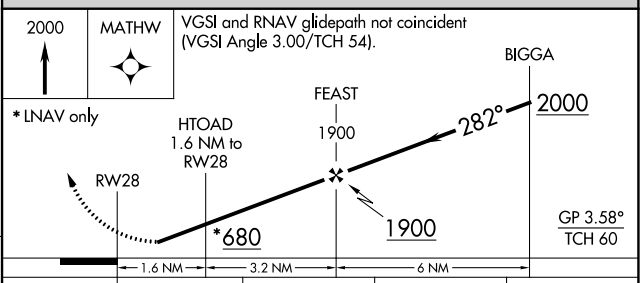

CATEGORY	A	B	C	D
LPV DA	346-1 300 (300-1)			NA
LNAV/VNAV DA	356-1 310 (400-1)			NA
LNAV MDA	420-1 374 (400-1)			NA
C CIRCLING	600-1 545 (600-1)		640-1½ 585 (600-1½)	NA

NE-2, 25 FEB 2021 to 25 MAR 2021
NE-2, 25 FEB 2021 to 25 MAR 2021