

# ZAAPA FIVE DEPARTURE (RNAV)



EC-2, 25 FEB 2021 to 25 MAR 2021

**TOP ALTITUDE:  
ASSIGNED BY ATC**

ASOS  
121.425  
CINC DEL  
125.7  
CTAF  
122.7  
CLEVELAND DEP CON  
126.35 346.325

**TAKEOFF MINIMUMS:**  
Rwys 7, 25: Standard with a minimum climb of 500' per NM to 1300.

- NOTE: RADAR required.
- NOTE: RNAV 1.
- NOTE: DME/DME/IRU or GPS required.
- NOTE: PUUDL TRANSITION: For aircraft at or below FL220 only or as assigned by ATC.

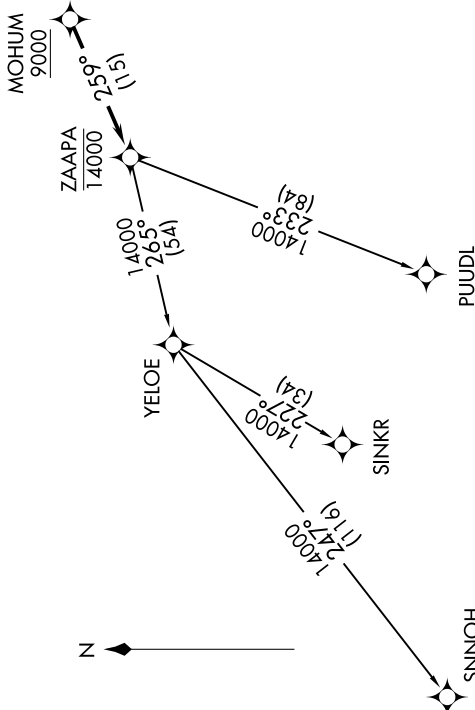

## DEPARTURE ROUTE DESCRIPTION

**TAKEOFF RUNWAY 7:** Climb on heading 073° to 1300, then on heading 360° or as assigned by ATC for RADAR vectors to cross MOHUM at or above 9000, thence....

**TAKEOFF RUNWAY 25:** Climb on heading 253° to 1300, then right turn heading 360° or as assigned by ATC for RADAR vectors to cross MOHUM at or above 9000, thence....

....on track 259° to cross ZAAPA at or below 14000, then on (transition). Maintain ATC assigned altitude, expect filed altitude ten minutes after departure.

- PUUDL TRANSITION [ZAAPA5.PUUDL]
- SINKR TRANSITION [ZAAPA5.SINKR]
- SNNOH TRANSITION [ZAAPA5.SNNOH]

NOTE: Chart not to scale.

# ZAAPA FIVE DEPARTURE (RNAV)

EC-2, 25 FEB 2021 to 25 MAR 2021