


LOC I-MZR 109.5	APP CRS 222°	Rwy Idg 7505	TDZE 78
		Apt Elev 79	

ILS or LOC RWY 22



MONROE RGNL (MLU)

DME or RADAR required for procedure entry.		MALSR 	MISSED APPROACH: Climb to 1800 then climbing right turn to 3000 direct MLU VORTAC and hold.	
	Circling Rwy 14 NA at night. # DME from MLU VORTAC.			

ATIS 125.05	MONROE APP CON * 118.15 290.475	MONROE TOWER * 118.9 (CTAF) 257.8	GND CON 121.9	CLNC DEL 121.65	UNICOM 122.95
-----------------------	---	---	-------------------------	---------------------------	-------------------------

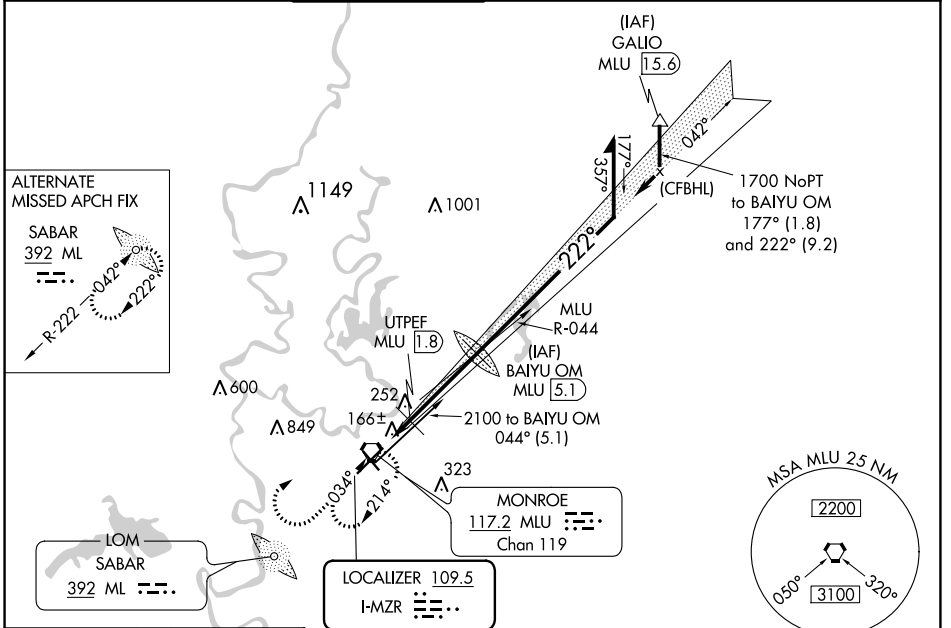

ELEV 79	D TDZE 78
---------	------------------

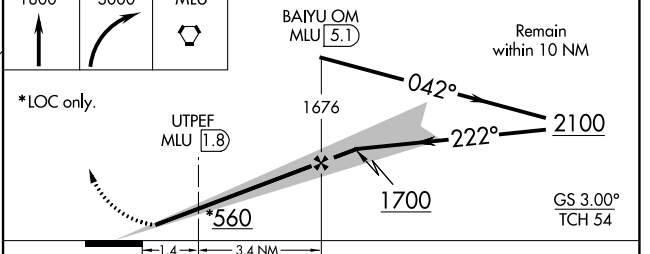

CATEGORY	A	B	C	D
S-ILS 22	278-1/2 200 (200-1/2)			
S-LOC 22	560-1/2	482 (500-1/2)	560-1	482 (500-1)
CIRCLING	580-1	501 (600-1)	620-1/2 541 (600-1/2)	640-2 561 (600-2)
# UTPEF FIX MINIMUMS				
S-LOC 22	420-1/2	342 (400-1/2)	420-5/8	342 (400-5/8)
CIRCLING	580-1	501 (600-1)	620-1/2 541 (600-1/2)	640-2 561 (600-2)

REIL Rws 14 and 32
MIRL Rwy 14-32
HIRL Rwy 4-22

FAF to MAP 4.8 NM

Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

SC-4, 25 FEB 2021 to 25 MAR 2021

SC-4, 25 FEB 2021 to 25 MAR 2021